




SIMPLICITY.
APPLIED.

UNIVERSAL SOLE PATH COMMERCIAL FIRE COMMUNICATOR

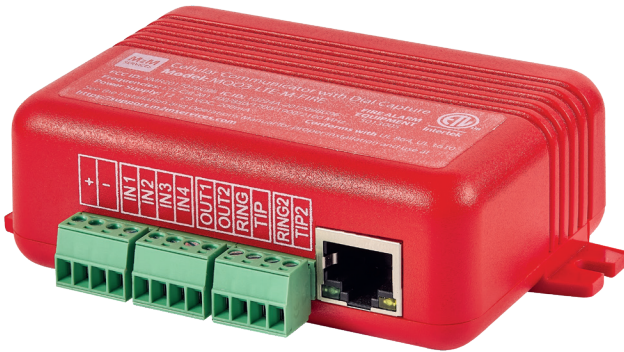

MQ03-LTE-M-FIRE-AV



FUTURE-PROOF TECHNOLOGY

Dual-SIM on AT&T/Verizon LTE-M networks



FAST AND EASY INSTALLATION

with any panel using Contact ID, SIA and Pulse 4+2



RELIABLE DATA REPORTING

to any Central Station from coast to coast




IMPROVED RECURRING REVENUE

Low flat-rate monthly fees for improved profitability



SIMPLICITY.
APPLIED.



MQ03-LTE-M-FIRE-AV

MAIN FEATURES

REPORTING FORMATS – Dial Capture Interface supporting Contact ID, SIA and Pulse 4+2

EXCEPTIONAL REDUNDANCY – Dual-SIM for AT&T/Verizon. Optional reporting through LAN

SUPERVISED CONNECTIVITY – 5 minute polling

ADMIN PORTAL – Online 24/7 device management & real-time status monitoring of user accounts

FULL EVENT REPORTING – Reliable reporting to any Central Station

INSTALLER MOBILE APP – Real-time on-site communication diagnostics and device configuration

UNIVERSAL PANEL COMPATIBILITY – Works on 12 to 29 VDC, supporting a wide range of fire panels

4 PROGRAMMABLE INPUTS – Used for relay output connection of the FACP.

SPECIFICATIONS

- Multi-band CAT-M1 LTE
700/850/1700/1900/2100 MHz
- 2 Telco interfaces (Dial Capture): CID, SIA, Pulse 4+2
- 4 inputs & 2 outputs (programmable)
- Supply voltage: +12 to +29 VDC
- Consumption: Standby 50mA, Peak 200mA
- Dimensions: 2.48" x 3.54" x 1.26"
- Weight: 2.56oz without antenna

CERTIFICATIONS

- UL 864 - for Control Units and Accessories for Fire Alarm Systems, listed as a sole path cellular
- UL 1610 - for Central-Station Burglar-Alarm Units
- CSFM - 7300 - Fire Alarm Control Unit Accessories

RCONTROL ADMIN MOBILE APP

